

VOICE CONTROL


Robot operation the easy way!

FEATURES

- Additional functionality for all telemax systems by employing Artificial Intelligence
- Speaker-independent control of EOD robot in German and English
- Activation by wake word or at the push of a button
- Local speech processing without internet connection
- Plug&Play capable
- Compatible with telemax 4x4, telemax PRO, telemax HYBRID and telemax PLUS

BENEFITS

- Fast and intuitive operation of the EOD robot
- Natural language based speech recognition: Learning of specific commands is not necessary
- Simplified operation, more efficient and less stressful
- Local data processing, nothing is stored in the cloud
- Easy self-installation

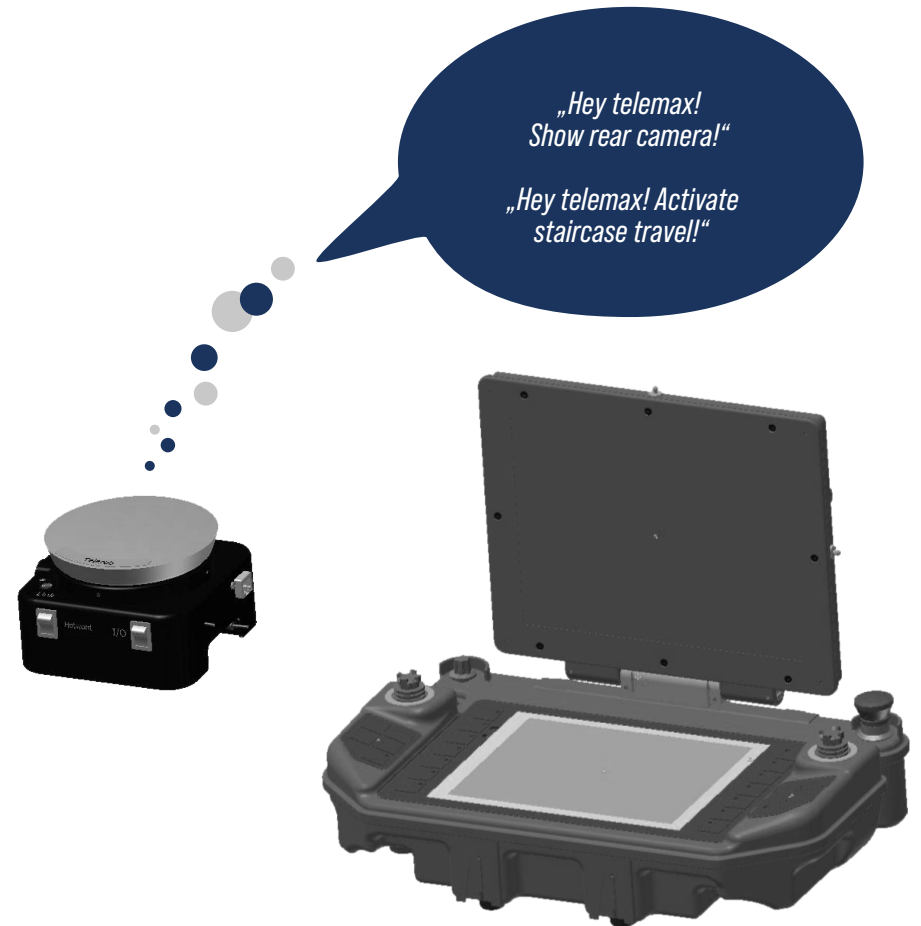

TECHNICAL DATA GENERAL

DIMENSIONS	135 x 140 x 90 mm (5.3 x 5.5 x 3.5 inches)
WEIGHT	Approx. 1 kg (2.2 lbs.)
EXTERNAL INTERFACES	Ethernet RY 45, Micro USB
SUPPORTED LANGUAGES	German, English, others on request
COMPATIBILITY	Control panel telemax family

TECHNICAL DATA USB MICROPHONE/LOUDSPEAKER

TYPE LOUDSPEAKER	50 mm full range Neodyne loudspeaker
FREQUENCY RANGE LOUDSPEAKER	250 Hz to 14 KHz
FREQUENCY RANGE MICROPHON	150 Hz to 6.5 KHz

TECHNICAL DATA POWERBANK

CAPACITY	6700 mAh
OUTLET	DC 5V / 2.4 A
INLET	DC 5V / 2A

